

Parkway SQUARE™



CodeLinkSM



Scan code
to download
PKWM Spec
Sheet

CodeLinkSM



Scan code
to download
PKWS Spec
Sheet

CodeLinkSM



Scan code
to download
PKWB Spec
Sheet

Elegant STYLING
HIGH PERFORMANCE

ARCHITECTURAL AREA LIGHTING




Parkway Square – Pedestrian Scale

Elegant Styling
Unique options for either contemporary or traditional styling

High Performance
Features precision optical systems with energy efficient sources including LED, HID, induction and the new CosmoPolis™ lamp

MicroEmitter™ LED technology
Powerful, uniform illumination with low glare

Modular Design
Truly customize the look with three hood styles, four optical systems, five decorative screen options, and various material finishes

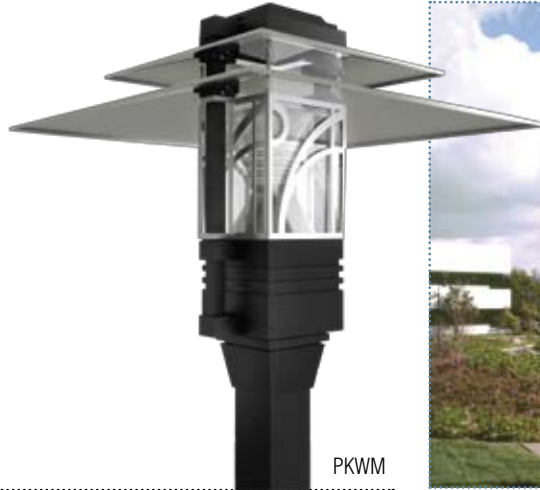

PKWM



ORDERING INFORMATION

1. LUMINAIRE

PKWM
Parkway Square Medium
29.75" SQ x 30.5" H - Vertical
23" SQ x 30.5" H - Horizontal

2. HOOD



• ANG – Angled Hood



• STR – Straight Hood
• IND – Indirect Hood
(underside finished in high reflectance white)



• DBL – Double Hood

3. OPTICS

MICROEMITTER LED SYSTEM
Available with ANG and LEDs only

T2 IES Type 2 distribution
T3 IES Type 3 distribution
T4 IES Type 4 distribution
T5 IES Type 5 distribution

HORIZONTAL OPTICAL SYSTEM
Available with ANG only

H2 IES Type 2 distribution
H3 IES Type 3 distribution
H4 IES Type 4 distribution
H5 IES Type 5 distribution

VERTICAL OPTICAL SYSTEM

GLA Frosted Glass Diffuser
GR3 Glass Refractor. Type 3 distribution.
GR5 Glass Refractor. Type 5 distribution.

INDIRECT OPTICAL SYSTEM
Available with IND hood only

-3 IES Type 3 distribution
-5 IES Type 5 distribution

BARE LAMP

Available with IL system only
BLO Bare lamp system

4. LAMP/BALLAST

70MH	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	150PSMHT6	120/277 volt ballast. G12 base, T6 ceramic lamp.	CF*	120 thru 277 volt. Use GX24q base, 26, 32 or 42 watt. Specify wattage.
70MHEB	120 thru 277 volt electronic ballast. Medium base, ED-17 lamp.	150MHEB	120 or 277 volt electronic ballast. Medium base, ED-17 lamp.	140CO*	CosmoPolis™ 200 thru 277 volt electronic ballast. Use PGZ12 base CosmoPolis™ lamp.
70MHT6	120/277/347 volt ballast. G12 base, T6 ceramic lamp.	150MHT6EB	120 or 277 volt electronic ballast. G12 base, T6 ceramic lamp.	60LED-WW	Warm white (3500K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only
70MHT6EB	120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	70HPS	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	60LED-BW	Bright white (5100K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only
100MH	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	100HPS	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	<i>All ballasts are factory wired for 277 volts, unless specified. Lamps not included, except IL and LED. All applicable ballasts are EISA compliant. *Not available with horizontal optics. CosmoPolis™ is a trademark of Philips Lighting®</i>	
100MHEB	120 thru 277 volt electronic ballast. Medium base, ED-17 lamp.	150HPS	120/208/240/277 volt ballast. Medium base, ED-17 lamp.		
150PSMHT6	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	IL85	120, 208, 240 or 277 volt induction lamp. Available in bare lamp configuration with LDL lens only.		

5. DECORATIVE SCREENS (OPTIONAL)

DSIN Infinity
DSOF Offset
DSWH Wheat
DSTR Trio
DSCS Custom*
*Contact factory

6. OPTIONS

ULS Upper lens shield. Reduces light above hood.
TEN 2 3/8" O.D. x 4" long tenon. Not required for PS4.
TA23 Tenon adaptor slips over a 2 3/8" O.D. by 4" long tenon. Required for poles by others.

LDL Lightly diffused lens
347 120/240/347 volt ballast. HID only, except 50MH and 50HPS.
COP Brushed copper hood
STS Stainless steel hood
SSP Screen in brushed stainless steel
CPR Screen in brushed copper

7. COLOR

All 13 standard and 4 premium AAL colors available. For RAL, please submit a 4-digit RAL number or color chip for custom colors.

8. MOUNTING

Please refer to Parkway Square brochure for mounting options.

Ordering
Information
Example

LUMINAIRE HOOD OPTICS LAMP/BALLAST SCREENS OPTIONS COLOR MOUNTING
PKWM IND -3 150PSMHT6 DSWH - MAL PSA-TU

Refer to AAL's Parkway Square brochure for photometry and complete specification and ordering details.

Parkway Square – Accent Scale

Elegant Styling

Unique options for either contemporary or traditional styling

High Performance

Features precision optical systems with energy efficient sources including LED, HID, induction and the new CosmoPolis™ lamp

Long Lasting

Newest LED technology for bright, efficient illumination

Modular Design




Truly customize the look with three hood styles, four optical systems, five decorative screen options, and various material finishes



PKWS



ORDERING INFORMATION

1. LUMINAIRE PKWS Parkway Square Small 21" SQ x 21.75" H - Vertical 14" SQ x 23" H - Horizontal	2. HOOD  • ANG – Angled Hood	 • STR – Straight Hood • IND – Indirect Hood (underside finished in high reflectance white)	 • DBL – Double Hood																	
3. OPTICS <table border="1"> <tr> <th data-bbox="107 934 451 997">LED SYSTEM <i>Available with ANG and LEDs only</i></th> <th data-bbox="451 934 795 997">HORIZONTAL OPTICAL SYSTEM <i>Available with T6 lamps and ANG only</i></th> <th data-bbox="795 934 1209 997">VERTICAL OPTICAL SYSTEM</th> <th data-bbox="1209 934 1534 997">INDIRECT OPTICAL SYSTEM <i>Available with IND hood only</i></th> </tr> <tr> <td data-bbox="107 997 451 1060"> T1 IES Type 1 distribution T3 IES Type 3 distribution T5 IES Type 5 distribution </td> <td data-bbox="451 997 795 1060"> H2 IES Type 2 distribution H3 IES Type 3 distribution H4 IES Type 4 distribution H5 IES Type 5 distribution </td> <td data-bbox="795 997 1209 1060"> GLA Frosted Glass Diffuser. GR3 Glass Refractor. Type 3 distribution. GR5 Glass Refractor. Type 5 distribution. </td> <td data-bbox="1209 997 1534 1060"> -3 IES Type 3 distribution -5 IES Type 5 distribution </td> </tr> <tr> <td colspan="3" data-bbox="107 1060 1209 1123"> BARE LAMP <i>Available with IL system only</i> BLO Bare lamp system </td> <td></td> </tr> </table>				LED SYSTEM <i>Available with ANG and LEDs only</i>	HORIZONTAL OPTICAL SYSTEM <i>Available with T6 lamps and ANG only</i>	VERTICAL OPTICAL SYSTEM	INDIRECT OPTICAL SYSTEM <i>Available with IND hood only</i>	T1 IES Type 1 distribution T3 IES Type 3 distribution T5 IES Type 5 distribution	H2 IES Type 2 distribution H3 IES Type 3 distribution H4 IES Type 4 distribution H5 IES Type 5 distribution	GLA Frosted Glass Diffuser. GR3 Glass Refractor. Type 3 distribution. GR5 Glass Refractor. Type 5 distribution.	-3 IES Type 3 distribution -5 IES Type 5 distribution	BARE LAMP <i>Available with IL system only</i> BLO Bare lamp system								
LED SYSTEM <i>Available with ANG and LEDs only</i>	HORIZONTAL OPTICAL SYSTEM <i>Available with T6 lamps and ANG only</i>	VERTICAL OPTICAL SYSTEM	INDIRECT OPTICAL SYSTEM <i>Available with IND hood only</i>																	
T1 IES Type 1 distribution T3 IES Type 3 distribution T5 IES Type 5 distribution	H2 IES Type 2 distribution H3 IES Type 3 distribution H4 IES Type 4 distribution H5 IES Type 5 distribution	GLA Frosted Glass Diffuser. GR3 Glass Refractor. Type 3 distribution. GR5 Glass Refractor. Type 5 distribution.	-3 IES Type 3 distribution -5 IES Type 5 distribution																	
BARE LAMP <i>Available with IL system only</i> BLO Bare lamp system																				
4. LAMP/BALLAST <table border="1"> <tr> <td data-bbox="107 1186 584 1249">20MMC* 120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.</td> <td data-bbox="584 1186 1055 1249">70MHEB* 120 thru 277 volt electronic ballast. Medium base, ED-17 lamp.</td> <td data-bbox="1055 1186 1534 1270">60CO* CosmoPolis™ 200 thru 277 volt electronic ballast. Use PGZ12 base CosmoPolis™ lamp.</td> </tr> <tr> <td data-bbox="107 1249 584 1291">39MMC* 120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.</td> <td data-bbox="584 1249 1055 1291">70MHT6EB 120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.</td> <td data-bbox="1055 1270 1534 1333">36LED-WW Warm white (3500K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only.</td> </tr> <tr> <td data-bbox="107 1291 584 1333">39MHT6EB 120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.</td> <td data-bbox="584 1291 1055 1333">50HPS* 120/277 volt ballast. Use medium base, ED-17 lamp.</td> <td data-bbox="1055 1333 1534 1396">36LED-BW Bright white (5100K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only.</td> </tr> <tr> <td data-bbox="107 1333 584 1375">50MH* 120/208/240/277 volt ballast. Medium base, ED-17 lamp.</td> <td data-bbox="584 1333 1055 1375">70HPS* 120/208/240/277 volt ballast. Use medium base, ED-17 lamp.</td> <td colspan="1" data-bbox="1055 1396 1534 1522" rowspan="3"> <i>All ballasts are factory wired for 277 volts, unless specified. Lamps not included, except IL and LED. All applicable ballasts are EISA compliant. *Not available with horizontal or LED optics. Mini MasterColor® is a registered trademark and CosmoPolis™ is a trademark of Philips Lighting®</i> </td> </tr> <tr> <td data-bbox="107 1375 584 1417">70MH* 120/208/240/277 volt ballast. Medium base, ED-17 lamp.</td> <td data-bbox="584 1375 1055 1417">CF* 120 thru 277 volt. Use GX24q base, 26, 32 or 42 watt. Specify wattage.</td> </tr> <tr> <td data-bbox="107 1417 584 1501">70MHT6 120/277/347 volt ballast. Use G12 base, T6 ceramic lamp.</td> <td data-bbox="584 1417 1055 1501">IL55* 120, 208, 240 or 277 volt induction lamp. Bare lamp optic with LDL lens only.</td> </tr> </table>				20MMC* 120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.	70MHEB* 120 thru 277 volt electronic ballast. Medium base, ED-17 lamp.	60CO* CosmoPolis™ 200 thru 277 volt electronic ballast. Use PGZ12 base CosmoPolis™ lamp.	39MMC* 120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.	70MHT6EB 120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	36LED-WW Warm white (3500K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only.	39MHT6EB 120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	50HPS* 120/277 volt ballast. Use medium base, ED-17 lamp.	36LED-BW Bright white (5100K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only.	50MH* 120/208/240/277 volt ballast. Medium base, ED-17 lamp.	70HPS* 120/208/240/277 volt ballast. Use medium base, ED-17 lamp.	<i>All ballasts are factory wired for 277 volts, unless specified. Lamps not included, except IL and LED. All applicable ballasts are EISA compliant. *Not available with horizontal or LED optics. Mini MasterColor® is a registered trademark and CosmoPolis™ is a trademark of Philips Lighting®</i>	70MH* 120/208/240/277 volt ballast. Medium base, ED-17 lamp.	CF* 120 thru 277 volt. Use GX24q base, 26, 32 or 42 watt. Specify wattage.	70MHT6 120/277/347 volt ballast. Use G12 base, T6 ceramic lamp.	IL55* 120, 208, 240 or 277 volt induction lamp. Bare lamp optic with LDL lens only.	
20MMC* 120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.	70MHEB* 120 thru 277 volt electronic ballast. Medium base, ED-17 lamp.	60CO* CosmoPolis™ 200 thru 277 volt electronic ballast. Use PGZ12 base CosmoPolis™ lamp.																		
39MMC* 120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.	70MHT6EB 120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	36LED-WW Warm white (3500K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only.																		
39MHT6EB 120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	50HPS* 120/277 volt ballast. Use medium base, ED-17 lamp.	36LED-BW Bright white (5100K). Class 1, 120 thru 277 volt. Available with ANG and LED optics only.																		
50MH* 120/208/240/277 volt ballast. Medium base, ED-17 lamp.	70HPS* 120/208/240/277 volt ballast. Use medium base, ED-17 lamp.	<i>All ballasts are factory wired for 277 volts, unless specified. Lamps not included, except IL and LED. All applicable ballasts are EISA compliant. *Not available with horizontal or LED optics. Mini MasterColor® is a registered trademark and CosmoPolis™ is a trademark of Philips Lighting®</i>																		
70MH* 120/208/240/277 volt ballast. Medium base, ED-17 lamp.	CF* 120 thru 277 volt. Use GX24q base, 26, 32 or 42 watt. Specify wattage.																			
70MHT6 120/277/347 volt ballast. Use G12 base, T6 ceramic lamp.	IL55* 120, 208, 240 or 277 volt induction lamp. Bare lamp optic with LDL lens only.																			
5. DECORATIVE SCREENS (OPTIONAL) DSIN Infinity DSOF Offset DSWH Wheat DSTR Trio DSCS Custom* *Contact factory	6. OPTIONS ULS Upper lens shield. Reduces light above hood. TEN3 3" O.D. x 3" long tenon. Not required for PS3 and PR3. LDL Lightly diffused lens	347 120/240/347 volt ballast. HID only, except 50MH and 50HPS. COP Brushed copper hood STS Stainless steel hood SSP Screen in brushed stainless steel CPR Screen in brushed copper	7. COLOR All 13 standard and 4 premium AAL colors available. For RAL, please submit a 4-digit RAL number or color chip for custom colors. 8. MOUNTING Please refer to Parkway Square brochure for mounting options.																	
Ordering Information Example	<table border="1"> <tr> <th>LUMINAIRE</th> <th>HOOD</th> <th>OPTICS</th> <th>LAMP/BALLAST</th> <th>SCREENS</th> <th>OPTIONS</th> <th>COLOR</th> <th>MOUNTING</th> </tr> <tr> <td>PKWS</td> <td>ANG</td> <td>GLA</td> <td>70MH</td> <td>-</td> <td>COP</td> <td>DBZ</td> <td>PSWM-BD</td> </tr> </table>			LUMINAIRE	HOOD	OPTICS	LAMP/BALLAST	SCREENS	OPTIONS	COLOR	MOUNTING	PKWS	ANG	GLA	70MH	-	COP	DBZ	PSWM-BD	Refer to AAL's Parkway Square brochure for photometry and complete specification and ordering details.
	LUMINAIRE	HOOD	OPTICS	LAMP/BALLAST	SCREENS	OPTIONS	COLOR	MOUNTING												
PKWS	ANG	GLA	70MH	-	COP	DBZ	PSWM-BD													

Parkway Square – Bollard

Elegant Styling

Sophisticated styling available in contemporary or traditional options

High Performance

Features precision optical systems with energy efficient sources including LED, HID, induction and the new CosmoPolis™ lamp

Long Lasting

Newest LED technology for bright, efficient illumination

Modular Design

Truly customizable with three optical systems, five decorative screen options, and various material finishes



PKWB



ORDERING INFORMATION

1. LUMINAIRE

PKWB

Parkway Square Bollard – 14" SQ x 42" H

2. OPTICS

LED SYSTEM

Available with LEDs only

T1	IES Type 1 distribution
T3	IES Type 3 distribution
T5	IES Type 5 distribution

HORIZONTAL OPTICAL SYSTEM

Available with T6 lamps only

H2	IES Type 2 distribution
H3	IES Type 3 distribution
H4	IES Type 4 distribution
H5	IES Type 5 distribution

VERTICAL OPTICAL SYSTEM

Not available with LED

GLA	Frosted Glass Diffuser
GR3	Glass Refractor. IES Type 3 distribution.
GR5	Glass Refractor. IES Type 5 distribution.

BARE LAMP

Available with IL system only

BLO	Bare lamp system
-----	------------------

3. LAMP/BALLAST

20MMC*	120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.	70MHEB*	120 thru 277 volt electronic ballast. Medium base, ED-17 lamp.	60CO*	CosmoPolis™ 200 thru 277 volt electronic ballast. Use PGZ12 base CosmoPolis™ lamp.
39MMC*	120 thru 277 volt electronic ballast. PGJ5 base, Mini MasterColor® lamp.	70MHT6EB	120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	36LED-WW	Warm white (3500K). Class 1, 120 thru 277 volt. Available with LED optics only.
39MHT6EB	120 thru 277 volt electronic ballast. G12 base, T6 ceramic lamp.	50HPS*	120/277 volt ballast. Use medium base, ED-17 lamp.	36LED-BW	Bright white (5100K). Class 1, 120 thru 277 volt. Available with LED optics only.
50MH*	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	70HPS*	120/208/240/277 volt ballast. Use medium base, ED-17 lamp.	<i>All ballasts are factory wired for 277 volts, unless specified. Lamps not included, except IL and LED. All applicable ballasts are EISA compliant. *Not available with horizontal or LED optics. Mini MasterColor® is a registered trademark and CosmoPolis™ is a trademark of Philips Lighting®</i>	
70MH*	120/208/240/277 volt ballast. Medium base, ED-17 lamp.	CF*	120 thru 277 volt. Use GX24q base, 26, 32 or 42 watt. Specify wattage.		
70MHT6	120/277/347 volt ballast. Use G12 base, T6 ceramic lamp.	IL55*	120, 208, 240 or 277 volt induction lamp. Bare lamp optic with LDL lens only.		

4. DECORATIVE SCREENS (OPTIONAL)

DSIN	Infinity
DSOF	Offset
DSWH	Wheat
DSTR	Trio
DSCS	Custom*
	*Consult factory

5. OPTIONS

ULS	Upper lens shield. Reduces light above hood.	STS	Stainless steel hood
LDL	Lightly diffused lens	SSP	Screen in brushed stainless steel
347	120/240/347 volt ballast. HID only, except 50MH and 50HPS.	CPR	Screen in brushed copper
COP	Copper hood		

6. COLOR

All 13 standard and 4 premium AAL colors available. For RAL, please submit a 4-digit RAL number or color chip for custom colors.

7. MOUNTING

PM	Pier mount
----	------------

Ordering Information Example

LUMINAIRE	OPTICS	LAMP/BALLAST	SCREENS	OPTIONS	COLOR	MOUNTING
PKWB	T3	30LED-BW	DSOF	-	CRT	PM

Refer to AAL's Parkway Square brochure for photometry and complete specification and ordering details.

