


LARGENT™ LED



CodeLinkSM

Scan code
to download
SLVT-LED Spec
Sheet

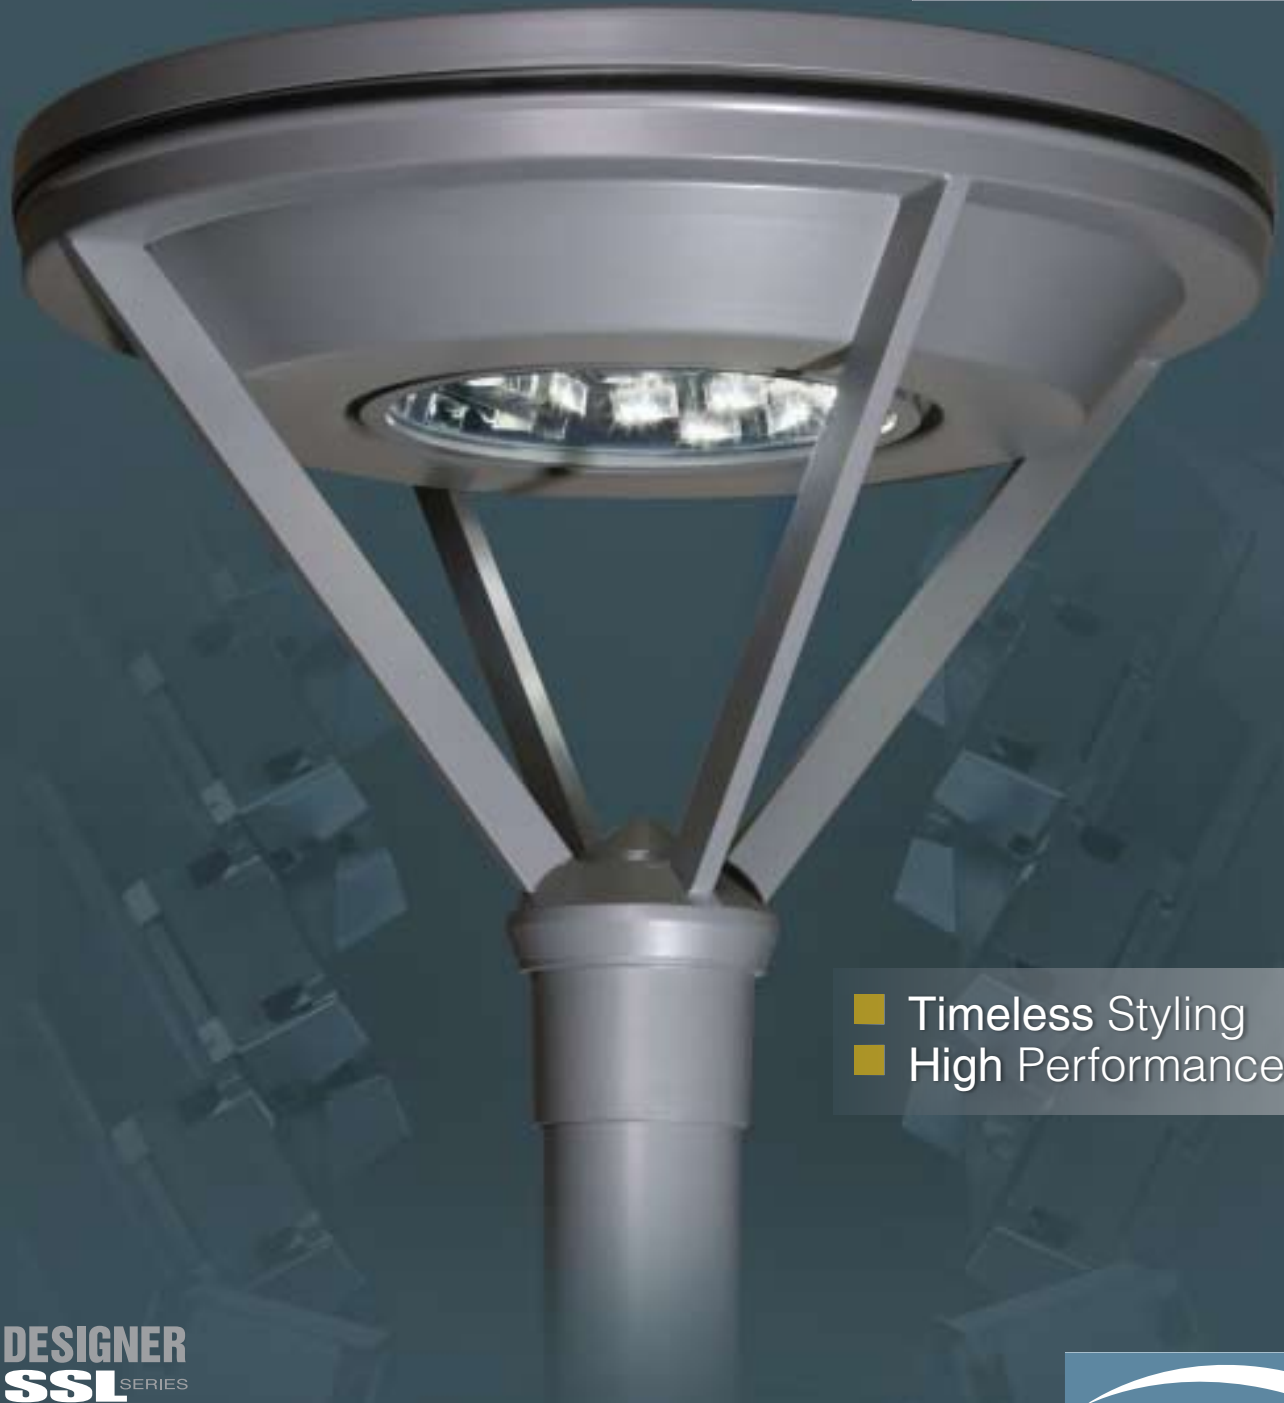

- Timeless Styling
- High Performance LEDs

DESIGNER
SSL SERIES
FEATURING
MICROEMITTER™
TECHNOLOGY

ARCHITECTURAL AREA LIGHTING



Largent™ LED

Timeless Styling

Contemporary style that will stand the test of time

MicroEmitter™ LED Technology

Powerful, uniform illumination with low glare

Canted MicroEmitter Design

Precisely aims each diode for maximum reach and uniformity

Upgradeable

Upgrade the LED EmitterDeck™ as technology advances or retrofit existing HID installations

LifeShield™ Protection System

Preserves diode life in extreme ambient conditions

Dimming Control

0 - 10v dimming capabilities



SLVT LED

NEW LED MODELS



Nighttime rendering with SLVT-T2

ORDERING INFORMATION

LUMINAIRE/LED CONFIGURATION

SLVT-T2-60LED-WW

IES Type 2. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Warm white (3500K).

SLVT-T3-60LED-WW

IES Type 3. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Warm white (3500K).

SLVT-T4-60LED-WW

IES Type 4. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Warm white (3500K).

SLVT-T5-60LED-WW

IES Type 5. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Warm white (3500K).

350mA drive current.

SLVT-T2-60LED-BW

IES Type 2. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Bright white (5100K).

SLVT-T3-60LED-BW

IES Type 3. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Bright white (5100K).



SLVT-T4-60LED-BW

IES Type 4. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Bright white (5100K).

SLVT-T5-60LED-BW

IES Type 5. 60 light emitting diode array (73 watts). Class 1, 120 thru 277 volt. Bright white (5100K).



UPGRADE KIT

A field replaceable upgrade kit is available for existing SLVT HID/CFL reflector models. The kit comes complete with driver and 20 LED MicroEmitters (60 diodes/73 watts). Please contact your AAL representative for complete details.

COLOR

All 13 standard AAL colors available. For RAL, please submit a 4-digit RAL number or color chip for custom colors.

MOUNTING

Select post top mount on a 4" O.D. pole or choose from a wide variety of arms. Please visit www.aal.net for a complete selection of decorative arms.

Ordering Information Example

LUMINAIRE/LED CONFIGURATION

SLVT-T3-60LED-BW

COLOR

MDG

MOUNTING

See Brochure

Refer to AAL's Largent brochure for photometry and complete specification and ordering details.

DESIGNER
SSL SERIES
FEATURING
MICROEMITTER™
TECHNOLOGY

PATENTS PENDING



16555 East Gale Ave.
City of Industry | CA 91745
T 626.968.5666 | F 626.369.2695
www.aal.net | Rev. 10/2010

